



# AUSTRAL FLOOR SAFES

## EXPLOSIVE, DRILL AND FORCE RESISTING (EDF) INGROUND FLOOR SAFES

### STANDARD FEATURES

**DOOR:** Heavy cast high-tensile steel construction fully chromium plated. Door section is secured below 25mm thick steel top plate. Special hinge is to move heavy door only and is not part of security.

**LOCKING:** 1 million change combination lock mounted on hardened steel, drill resistant plate.


Two spring loaded relocking devices incorporated in door and lock.

**BODY:** Heavy gauge steel with 25mm thick steel top plate machined to accept door with minimum of tolerance.

**HINGES:** Hinged door for ease of operation. (Doors are interchangeable).

**LID:** Heavy steel lid (not shown), fits flush with top of safe.

Deposit chute may be fitted if required.

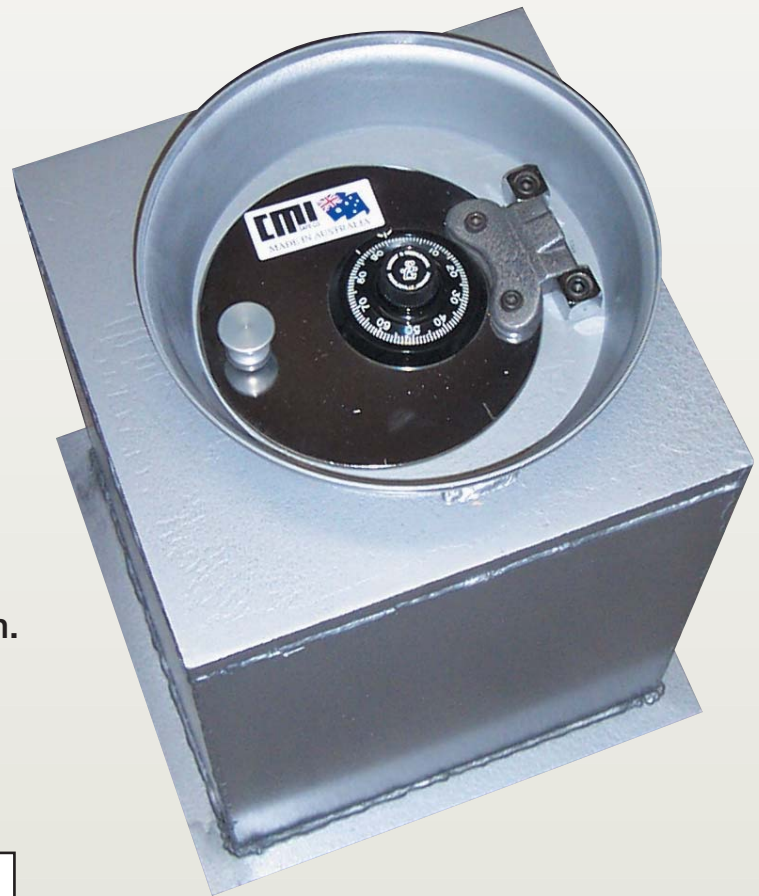

**INSTALLATION**

\$

MODEL A14

MODEL	CODE	HEIGHT	WIDTH	DEPTH	WEIGHT	PRICE
A14	External	440mm	360mm	360mm	36kg	\$
	Internal	330mm	305mm	305mm		
A9	External	305mm	360mm	360mm	32kg	\$
	Internal	230mm	305mm	305mm		

**SUGGESTED INSURABLE CASH RATING FOR AUSTRAL FLOOR SAFES IS AN UNSUPPORTED (NO ALARMS) SITUATION IS \$20,000**